


Model: Pressure Controller: PPL 15
(Adjustable Starting Pressure)


Specification:

Rated Voltage:	220V- 240V
Frequency:	50 Hz
Max Power:	1.5 kW *
Max Current:	16 A
Starting Pressure:	1.0 to 2.8 Bar
Max Working Pressure:	10 Bar
Connection:	1 Inch Threaded
Protection Rating:	IP 54
Max Working Temperature:	60 °C

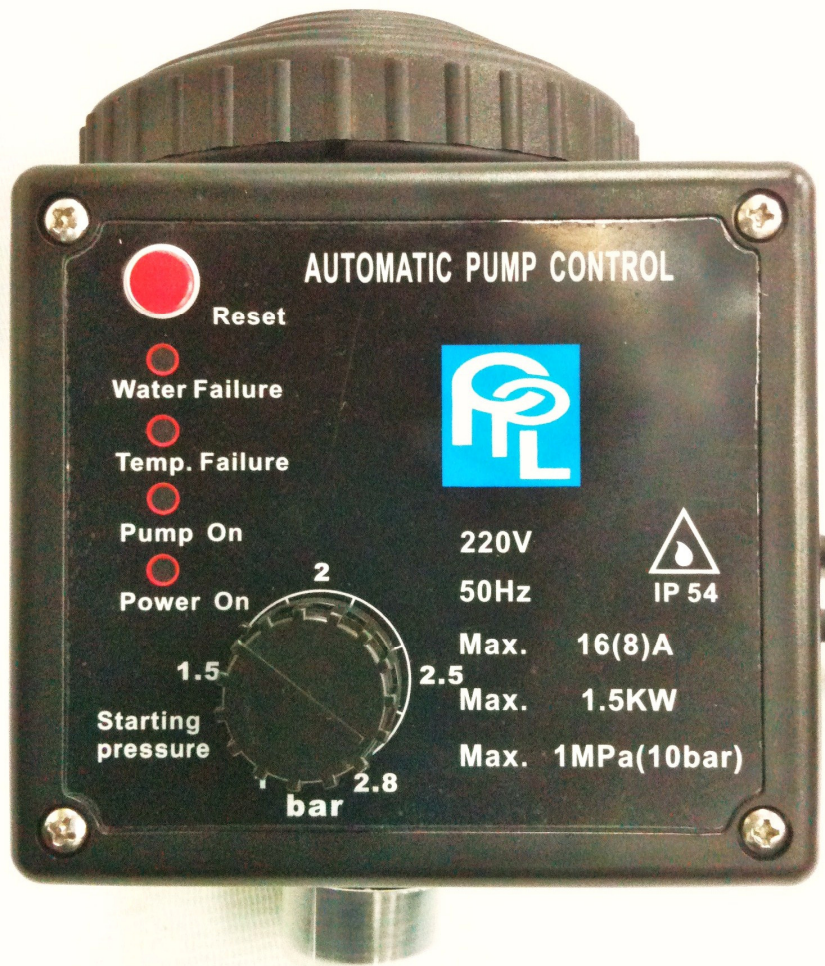

Description


In addition to the fundamental function of the pressure controller, water chamber inside the controller can offset frequent start-ups of the pump due to any minor leakage. The starting pressure of the pump can be set from 1.0 to 2.8bar by the knob on the panel. A temperature protection device is well constructed inside the controller and the inlet and outlet are assembled in 90°right angle.



Model: Pressure Controller: PPL 15
(Adjustable Starting Pressure)


Specification:

Rated Voltage:	220V- 240V
Frequency:	50 Hz
Max Power:	1.5 kW *
Max Current:	16 A
Starting Pressure:	1.0 to 2.8 Bar
Max Working Pressure:	10 Bar
Connection:	1 Inch Threaded
Protection Rating:	IP 54
Max Working Temperature:	60 °C

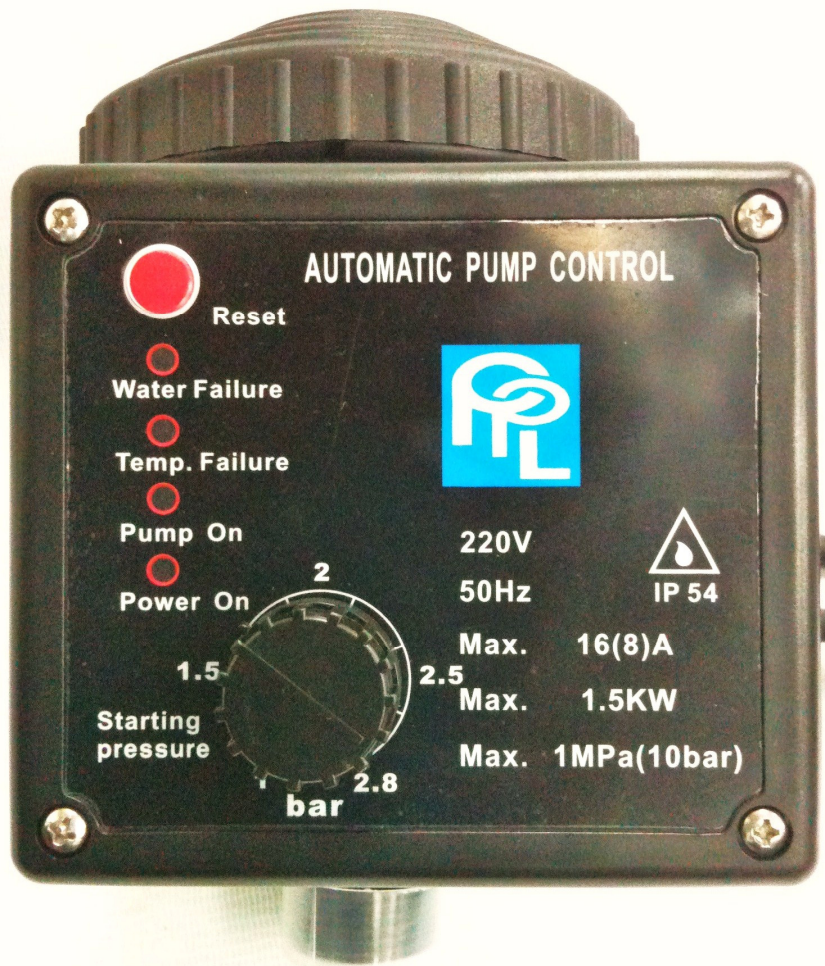

Description


In addition to the fundamental function of the pressure controller, water chamber inside the controller can offset frequent start-ups of the pump due to any minor leakage. The starting pressure of the pump can be set from 1.0 to 2.8bar by the knob on the panel. A temperature protection device is well constructed inside the controller and the inlet and outlet are assembled in 90°right angle.



Model: Pressure Controller: PPL 15
(Adjustable Starting Pressure)


Specification:

Rated Voltage:	220V- 240V
Frequency:	50 Hz
Max Power:	1.5 kW *
Max Current:	16 A
Starting Pressure:	1.0 to 2.8 Bar
Max Working Pressure:	10 Bar
Connection:	1 Inch Threaded
Protection Rating:	IP 54
Max Working Temperature:	60 °C

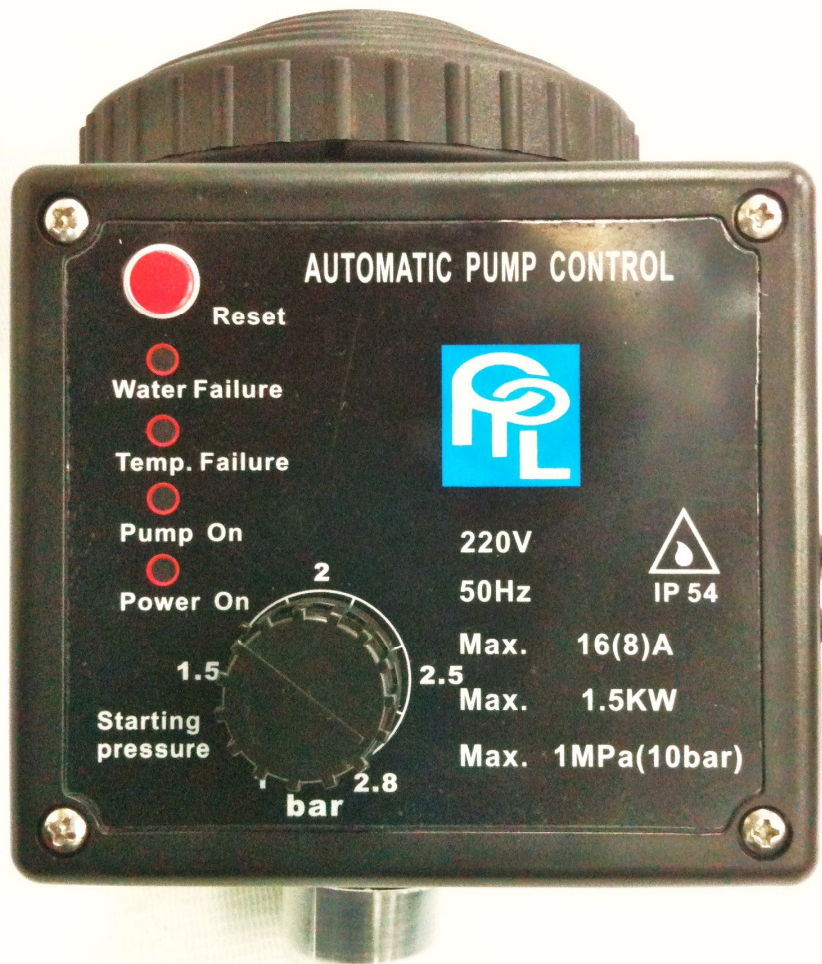

Description


In addition to the fundamental function of the pressure controller, water chamber inside the controller can offset frequent start-ups of the pump due to any minor leakage. The starting pressure of the pump can be set from 1.0 to 2.8bar by the knob on the panel. A temperature protection device is well constructed inside the controller and the inlet and outlet are assembled in 90°right angle.



Model: Pressure Controller: PPL 15
(Adjustable Starting Pressure)

Specification:

Rated Voltage:	220V- 240V
Frequency:	50 Hz
Max Power:	1.5 kW *
Max Current:	16 A
Starting Pressure:	1.0 to 2.8 Bar
Max Working Pressure:	10 Bar
Connection:	1 Inch Threaded
Protection Rating:	IP 54
Max Working Temperature:	60 °C

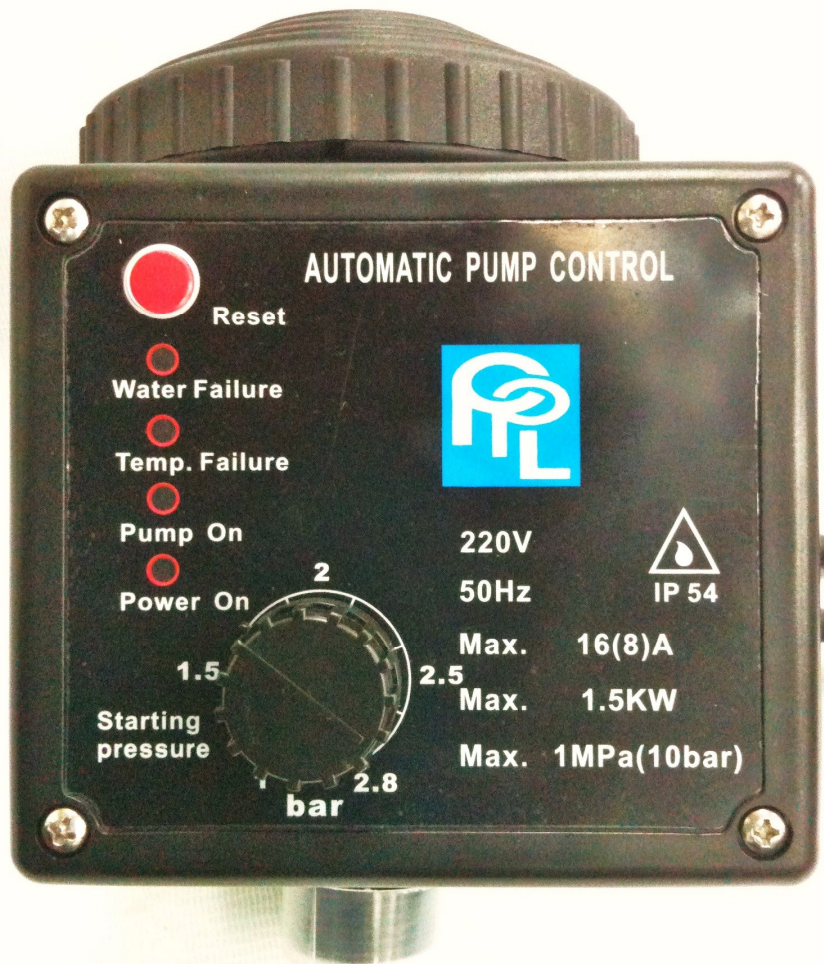

Description

In addition to the fundamental function of the pressure controller, water chamber inside the controller can offset frequent start-ups of the pump due to any minor leakage. The starting pressure of the pump can be set from 1.0 to 2.8bar by the knob on the panel. A temperature protection device is well constructed inside the controller and the inlet and outlet are assembled in 90°right angle.

